### KARCHER

### IVR-L 100/30 SC

The powerful IVR-L 100/30 liquid and swarf vacuum. With wear-free side channel blower. Designed for three-shift operation in production facilities. Extra long service life.









Order no.

9.986-064.0

■ User-friendly set-down mechanism


Technical data		
EAN code		4054278030043
Power supply	Ph / V / Hz	3 / 400 / 50 - 60
Air flow	l/s / m³/h	87.5 / 315
Vacuum	mbar / kPa	260 / 26
Container capacity	1	100
Container material		Metal
Rated input power	kW	3
Vacuuming type		Electric
Connection nominal diameter		DN 70
Accessory nominal diameter		DN 70 / DN 50
Main filter dust class		L
Filter area for main filter	m²	0.45
Weight without accessories	kg	132
Weight (with accessories)	kg	132
Weight incl. packaging	kg	132
Dimensions (L × W × H)	mm	850 × 760 × 1800

This machine requires instruction.

Equipment	
Accessories included in the scope of delivery	no
Container emptying	Set-down trolley
Included in the scope of supply.	

IVR-L 100/30 Sc, 9.986-064.0, 2025-11-30

### **KARCHER**

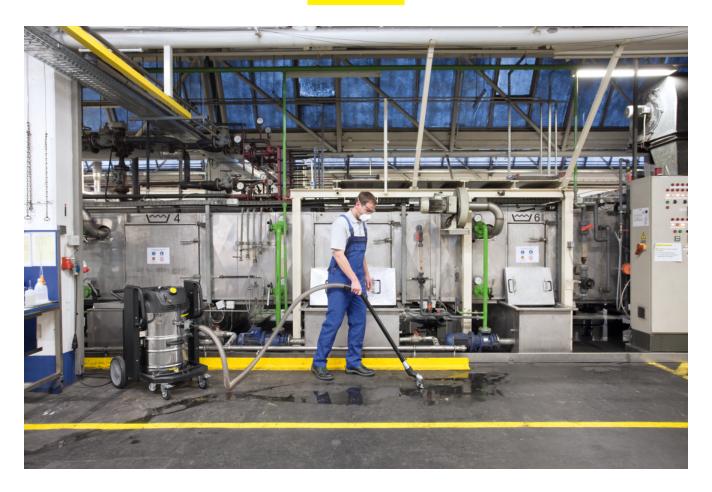



#### Wear-resistant side channel blower

 A side channel blower offers high suction power and durability. These machines are therefore ideal for multiple shift operation.



### Visual filling level indicator

- Always stay up to date: the filling level is visible at all times when vacuuming.
- Emptying can be carried out as required via the filling level hose.

#### Robust and reliable

• Ideal for use in the metals processing industry.

























1			_
	Order no.	Description	
1	9.980-857.0	Baffle plate made from plastic with 517 mm diameter for containers and tanks.	
2	9.977-678.0	Electroconductive and 45° curved handle made from stainless steel. Inner cone DN 50.	
3	9.977-677.0		
4	9.988-111.0	Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 50.	
5	9.977-531.0	850 mm long extension tube made from steel. Electroconductive and with inner cone DN 50.	
6	9.981-910.0	Electroconductive extension tube, internal cone DN 70, 850 mm total length.	
7	9.989-038.0	Aluminium extension tube, electroconductive, NW 40. Length: 1500 mm.	
8	9.989-035.0	Electrically conductive suction tube (1500 mm) made of aluminium with 50 mm diameter.	
9	9.988-114.0	Electroconductive extension tube made from stainless steel. Inner cone NW 50.	
	·		
10	9.990-896.0	Advanced liquid floor cleaning set: EVA hose (9.990-926.0), handle (9.990-928.0), $2 \times 10^{-9}$ suction tube (9.990-932.0), floor nozzle (9.990-938.0), standard nozzle (9.980-761.0).	
11	9.989-673.0	Electroconductive standard PVC nozzle. DN 50.	
12	9.989-676.0	Electroconductive standard PVC nozzle. DN 70.	
13	9.988-401.0	Stretchy standard nozzle made from silicone, inner cone DN 40.	
14	9.988-402.0		
	2 2 3 3 4 4 5 6 6 7 7 8 8 9 9 110 111 112 12 13	1 9.980-857.0 2 9.977-678.0 3 9.977-677.0 4 9.988-111.0 5 9.981-910.0 7 9.989-035.0 9 9.988-114.0 10 9.990-896.0 11 9.989-673.0 12 9.989-676.0 13 9.988-401.0	1 9.980-857.0 Baffle plate made from plastic with 517 mm diameter for containers and tanks.  2 9.977-678.0 Electroconductive and 45° curved handle made from stainless steel. Inner cone DN 50.  3 9.977-677.0  4 9.988-111.0 Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 50.  5 9.977-531.0 850 mm long extension tube made from steel. Electroconductive and with inner cone DN 50.  6 9.981-910.0 Electroconductive extension tube, internal cone DN 70, 850 mm total length.  7 9.989-038.0 Aluminium extension tube, electroconductive, NW 40. Length: 1500 mm.  8 9.989-035.0 Electrically conductive suction tube (1500 mm) made of aluminium with 50 mm diameter.  9 9.988-114.0 Electroconductive extension tube made from stainless steel. Inner cone NW 50.  10 9.990-896.0 Advanced liquid floor cleaning set: EVA hose (9.990-926.0), handle (9.990-928.0), 2 × suction tube (9.990-932.0), floor nozzle (9.990-938.0), standard nozzle (9.980-761.0).  11 9.989-673.0 Electroconductive standard PVC nozzle. DN 50.  12 9.989-676.0 Electroconductive standard PVC nozzle. DN 70.  13 9.988-401.0 Stretchy standard nozzle made from silicone, inner cone DN 40.

 $<sup>\</sup>blacksquare$  Included in the scope of supply.  $\qed$  Available accessories.

























		Order no.	Description	
NOZZLES		<u>'</u>		
Standard nozzles				
Standard silicone nozzle DN70	15	9.989-672.0	Electroconductive standard silicone nozzle. DN 70.	
Standard nozzle cuttable rubber DN50	16	9.989-675.0	Standard nozzle, electroconductive, made from cuttable rubber. DN 50.	
Standard aluminium nozzle DN50	17	9.980-749.0	Diagonal nozzle made from anodised aluminium, electroconductive, DN 50.	
Standard aluminium nozzle DN70	18	9.989-663.0	Standard nozzle made from aluminium. Electroconductive. DN 70.	
Flexible standard nozzles		<b>'</b>		
Standard nozzle flexible PVC DN50	19	9.981-421.0	Electroconductive, flexible round nozzle made from galvanised steel, DN 50, with rubber mouthpiece DN 30.	
Standard nozzle flexible PVC DN70	20	9.981-422.0	Flexible, electroconductive standard nozzle, DN 70, with rubber mouthpiece.	
Standard nozzle, flexible, angled 90° PP DN50	21	9.981-430.0	Flexible, electroconductive angled nozzle, DN 50, length: 800 mm.	
Floor nozzles	•	•		
Aluminium floor nozzle 200 mm DN50	22	9.981-426.0	Floor nozzle, DN 50, with 200 mm suction width.	
Aluminium floor nozzle 370 mm DN50	23	9.989-664.0	Floor nozzle. 370 mm, made from aluminium. Electroconductive. DN 50.	
Aluminium floor nozzle, el, 370 mm, DN50	24	9.987-612.0	Electroconductive multi-purpose floor nozzle. 370 mm wide, DN 50.	
Aluminium floor nozzle 500 mm DN50	25	9.989-684.0	Floor nozzle, 500 mm, made from aluminium. Electroconductive. DN 50.	
Aluminium floor nozzle, el, 500 mm, DN50	26	9.981-925.0	Floor nozzle with 500 mm suction width and hinge. DN 50, electroconductive.	
Stainless steel floor nozzle el 370 mm DN50	27	9.988-115.0	Floor nozzle (370 mm) made from stainless steel, electroconductive, DN 50.	
Floor nozzle rubber strip oil-resistant. 220 mm	28	9.981-923.0	Squeegee with plastic strip for floor nozzle, 220 mm wide.	

 $<sup>\</sup>blacksquare$  Included in the scope of supply.  $\qed$  Available accessories.



















		Order no.	Description	
NOZZLES				
Floor nozzles				
Floor nozzle rubber strip 370 mm	29	9.981-914.0	Squeegee with profiled strip for floor nozzle, 370 mm wide.	
Floor nozzle rubber strip 500 mm	30	9.981-915.0	Oil-resistant squeegee with profiled strip for floor nozzle, 500 mm wide.	
Floor nozzle brush strip el. 370 mm	31	9.984-939.0	Electroconductive squeegee for floor nozzle, 370 mm wide.	
Floor nozzle brush strip 500 mm	32	9.980-764.0	Brush strip set for floor nozzle 500 mm, with profiled strip.	
Crevice nozzles				
Crevice nozzle PP 15 mm × 145 mm DN50	33	9.988-117.0	Electroconductive, flat multi-purpose crevice nozzle made from plastic, DN 52.	
Crevice nozzle PU 22 mm × 175 mm DN50	34	9.981-482.0	Crevice nozzle made from PU, DN 50.	
Crevice nozzle 18 mm × 120 mm DN50	35	9.981-442.0	Electroconductive crevice nozzle made from sheet steel, DN 50, with 17 mm slot width.	
Crevice nozzle 25 mm × 120 mm DN50	36	9.981-465.0	Electroconductive crevice nozzle made from sheet steel, DN 50, with 25 mm slot width.	
Crevice nozzle 28 mm × 120 mm DN70	37	9.981-444.0	Electroconductive crevice nozzle made from sheet steel, DN 70, with 30 mm slot width.	
Stainless steel crevice nozzle 22 mm × 220 mm DN50	38	9.988-123.0	Stainless steel crevice nozzle, DN 42, suitable for use with foods.	
Flexible crevice nozzles				
Flexible crevice nozzle silicone 65 mm DN50	39	9.988-403.0	Flexible crevice nozzle made from silicone, DN 50.	
Flexible crevice nozzle 11 mm × 58 mm DN40	40	9.989-681.0	Electroconductive and flexible crevice nozzle, 11 × 58 mm.	
Flexible crevice nozzle 12 mm × 45 mm DN50	41	9.981-424.0	Flexible, electroconductive galvanised crevice nozzle, DN 50, with 13 mm slot width.	
Flexible crevice nozzle 20 mm × 45 mm DN50	42	9.981-425.0	Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 50.	

 $<sup>\</sup>blacksquare$  Included in the scope of supply.  $\qed$  Available accessories.

### **KÄRCHER**



























		Order no.	Description	
NOZZLES				
Surface nozzles				
Silicone surface nozzle 120 mm DN50	43	9.988-119.0	Electroconductive rubber nozzle, angled, DN 50, suitable for use with foods.	
Aluminium surface nozzle 150 mm DN50	44	9.989-665.0	Surface nozzle, 150 mm, made from aluminium. DN 50.	
Liquid nozzles				
Liquid nozzle 900 mm DN50	45	9.981-427.0	Bypass nozzle, DN 50, overall length: 1000 mm.	
Borehole nozzles				
Blind hole nozzle DN40	46	9.989-671.0	90° curved blind hole nozzle with 60 mm diameter.	
Blind hose nozzle angled 60° DN40	47	9.989-669.0	90° curved blind hole nozzle with 48 mm diameter. DN 40.	
Blind hole nozzle angled 90° DN40	48	9.989-667.0	90° curved blind hole nozzle with 60 mm diameter. DN 40.	
Blind hose nozzle angled 90° 200 mm extension DN40	49	9.989-670.0	90° curved blind hole nozzle with 48 mm diameter. DN 40.	
BRUSHES				
Standard brushes				
Standard brush 40 mm DN50	50	9.981-432.0	Flat brush nozzle DN 50.	
End brushes				
End brush Ø 82 mm DN50	51	9.989-608.0	Electroconductive end brush with 82 mm diameter. DN 50.	
Surface brushes				
Surface brush 300 mm DN50	52	9.981-912.0	Vacuum brush, 300 mm, with 45° connection, with star screw, horsehair bristles.	
HOSES				
EVA hoses				
Hose EVA NW50 3 m	53	9.988-090.0	Electroconductive hose with NW50. Suitable for temperatures up to 65°C. Length: 3 m.	
Hose EVA NW50 5 m	54	9.988-091.0		
Hose installation sets				
Hose installation kit DN50	55	9.989-628.0	Multipiece hose connection kit, DN 50.	
Hose installation kit DN70	56	9.989-629.0	Multipiece hose connection kit, DN 70.	
Available accessories		•		

 $<sup>\</sup>hfill \square$  Available accessories.















		Order no.	Description	
HOSES				
PU hoses				
Hose PU DN50 3 m	57	9.989-619.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m.	
Hose PU DN50 5 m	58	9.989-620.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	
PU hose DN50 15 m without connectors	59	9.989-638.0	PU hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m.	
Hose PU DN70 3 m	60	9.989-644.0	Oil-resistant, electroconductive PU hose, DN 70. Temperature-resistant up to 80 °C, suitable for abrasive suction media. Length: 3 m.	
Hose PU DN70 5 m	61	9.989-645.0	Oil-resistant, electroconductive PU hose, DN 70. Temperature-resistant up to 80 °C, suitable for abrasive suction media. Length: 5 m.	
PU hose DN70 15 m without connectors	62	9.989-639.0	PU hose without tap adapter, DN 70. Electroconductive and temperature-resistant up to 85 °C. Length: 15 m.	
ME-PU-hoses				
Hose ME-PU DN50 3 m	63	9.989-623.0	Electroconductive, oil-resistant ME-PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 3 m.	
Hose ME-PU DN50 5 m	64	9.989-625.0	Electroconductive, oil-resistant ME-PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 5 m.	
ME-PU hose DN50 15 m without connectors	65	9.989-641.0	Electroconductive, oil-resistant ME-PU hose without tap adapter, DN 50. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 15 m.	
Hose ME-PU DN70 3 m	66	9.989-646.0	Oil-resistant, electroconductive ME-PU hose, DN 70. Temperature-resistant up to $110^{\circ}$ C, suitable for abrasive suction media. Length: 3 m.	
Hose ME-PU DN70 5 m	67	9.989-648.0	Oil-resistant, electroconductive ME-PU hose, DN 70. Temperature-resistant up to $110^{\circ}$ C, suitable for abrasive suction media. Length: 5 m.	
ME-PU hose DN70 15 m without connectors	68	9.989-642.0	Electroconductive, oil-resistant ME-PU hose without tap adapter, DN 70. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 15 m.	
ADAPTERS / REDUCERS / DISTRIBUTORS				
Accessories adapter				
Adapter accessories DN 50 to DN 51	69	9.989-603.0	Steel adapter for connection of DN 50 to DN 51. Electroconductive.	
Adapter accessories DN 51 to DN 50	70	9.989-601.0	Steel adapter for connection of DN 51 to DN 50. Electroconductive.	

 $<sup>\</sup>hfill\square$  Available accessories.

### KÄRCHER























				$\top$
		Order no.	Description	
ADAPTERS / REDUCERS / DISTRIBUTORS				
Accessories adapter				ı,
Adapter accessories DN50 to DN61	71	9.989-602.0	Steel adapter for connection of DN 50 to DN 61. Electroconductive.	
Adapter accessories DN 61 to DN 50	72	9.989-604.0	Steel adapter for connection of DN 61 to DN 50. Electroconductive.	
Reducers/expanders				Ļ
Reducer DN 70 to DN 50	73	9.977-772.0		[
Reduction DN70 to DN40	74	9.989-690.0	Electroconductive steel reducer for reduction from DN 70 to DN 40.	[
Reduction DN50 to DN40	75	9.981-231.0	Reducer from DN 50 to DN 40. Material: Steel. Electroconductive.	[
Stainless steel reducer DN 70 to DN 50	76	9.989-712.0		[
Stainless steel reducer DN 70 to DN 40	77	9.989-713.0		1
Expander		-		Ė
Expansion DN50 to DN70	78	9.981-921.0	Reducer from external cone DN 50 to internal cone DN 70. Material: Steel. Electroconductive.	
Distributor				
Y distributor DN 70 to DN 50	79	9.989-611.0	Electroconductive steel fitting, DN 70/DN 50 / DN 50.	
Y-piece fitting DN50 to DN40	80	9.981-149.0	Manifold, electroconductive, steel, DN 50/40/40.	1
FILTERS	<u>'</u>			Ī
Surface filter				
Surface filter PE L 0.45 m <sup>2</sup>	81	9.980-180.0	Flat filter for dust class L with 470 mm diameter. Electroconductive and 0.45 m² filter area.	
EMPTYING SUPPORTS				
Strainer baskets				
Filter basket, stainless steel, Ø 495 mm, 40 l	82	9.980-849.0	Filter basket, stainless steel, 40 l, hole diameter 1.5 mm. For the efficient separation of liquids and shavings.	[
Fine fleece				
Fine fleece PE 40 I	83	9.981-048.0	Fine fleece filter made from polyester with 465 mm diameter. For separating fine metal shavings and liquids. With clamping ring, suitable for 40 litre filter basket.	
PRE-SEPARATORS				
Pre-separator	1			
Pre-separator Tc Op liquids 125   DN70	84	9.989-686.0	125 litre pre-separator, DN 70.	
☐ Available accessories.				

 $<sup>\</sup>hfill \square$  Available accessories.













		Order no.	Description	
PRE-SEPARATORS				
Pre-separator				
Pre-separator drum 200 l	85	9.989-685.0	Standard drum which complies with the ISO 15750-2 standard.	
Pre-separator lid		<b>'</b>		
Pre-separator cover Op liquids ø 517 mm DN70	86	9.981-666.0	Pre-separator cover DN 70. Suitable for containers with 517 mm diameter.	
Pre-separator cover Op liquids ø 575 mm DN70	87	9.981-662.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).	
Pre-separator cover solid materials ø 517 mm DN70	88	9.981-665.0	Pre-separator cover DN 70. Suitable for containers with 517 mm diameter.	
Pre-separator cover solid materials ø 575 mm DN70	89	9.981-661.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).	
ACCESSORIES STATIONARY				
IV pipelines				
IV pipe Ø 42.4 mm	90	9.980-451.0		
IV pipe Ø 60 mm	91	9.980-452.0	Robust steel pipe, 1 m in length and with a wall thickness of 2 mm. Made from high-quality lacquered steel.	
IV pipe Ø 75 mm	92	9.980-453.0		
IV pipe Ø 100 mm	93	9.980-455.0		
IV pipe elbow 30° Ø 60.3 mm	94	9.980-545.0		
IV pipe elbow 30° Ø 76.1 mm	95	9.980-546.0		
IV pipe elbow 30° Ø 101.6 mm	96	9.980-547.0		
IV pipe elbow 45° ø 60.3 mm	97	9.980-548.0		
IV pipe elbow 45° ø 76.1 mm	98	9.980-549.0		

 $<sup>\</sup>hfill\square$  Available accessories.











		Order no.	Description	
ACCESSORIES STATIONARY	_			
IV pipelines				
IV pipe elbow 45° ø 101.6 mm	99	9.980-550.0		
IV pipe elbow 60° ø 60.3 mm	100	9.980-551.0		
IV pipe elbow 60° ø 76.1 mm	101	9.980-552.0		
IV pipe elbow 60° ø 60.3 mm	102	9.980-553.0		
IV pipe elbow 90° ø 42.4 mm	103	9.985-373.0	Pipe elbow, hardened, made from coated steel with 2.6 mm wall thickness and 90° bend.	
IV pipe elbow 90° ø 60.3 mm	104	9.980-554.0		
IV pipe elbow 90° ø 76.1 mm	105	9.980-555.0		
IV pipe elbow 90° ø 101.6 mm	106	9.980-556.0		
IV pipe reduction Ø 120 mm to 100 mm	107	9.981-335.0	Reducer, painted, made from steel with 2 mm wall thickness. For reduction from 120 to 100 mm diameter. Length: 350 mm.	
IV pipe reduction Ø 120 mm to 60 mm	108	9.981-337.0	Reducer, painted, made from steel with 2 mm wall thickness. For reduction from DN 120 to DN 70. Length: 350 mm.	
IV pipe reduction Ø 100 mm to 75 mm	109	9.981-334.0	Steel reducer with 2 mm wall thickness for reduction from 100 to 75 mm diameter. Length: 350 mm.	
IV pipe reduction Ø 100 mm to 60 mm	110	9.981-336.0	Steel reducer with 2 mm wall thickness for reduction from 100 to 60 mm diameter. Length: 350 mm.	
IV pipe reduction Ø 80 mm to 75 mm	111	9.980-494.0		
IV pipe reduction Ø 80 mm to 60 mm	112	9.980-493.0		

<sup>☐</sup> Available accessories.









		Order no.	Description	
ACCESSORIES STATIONARY				
IV pipelines				
IV pipe reduction Ø 75 mm to 60 mm	113	9.981-333.0	Reducer, painted, made from steel with 2 mm wall thickness. For reduction from 75 to 60 mm diameter. Length: 350 mm.	
IV pipe reduction Ø 60 mm to 42.2 mm	114	9.981-228.0		
IV pipe manifold 30° branch Ø 120 mm to 100 mm	115	9.981-129.0		
IV pipe manifold 30° branch Ø 120 mm to 75 mm	116	9.981-127.0		
IV pipe manifold 30° branch Ø 100 mm to 75 mm	117	9.981-126.0		
IV pipe manifold 30° branch Ø 100 mm to 60 mm	118	9.981-124.0		
IV pipe manifold 30° branch Ø 75 mm to 60 mm	119	9.981-123.0		
IV pipe manifold 30° branch Ø 60 mm to 42.4 mm	120	9.981-258.0	Pipe branch, 600 mm long, made from steel with 30° bend and 2 mm wall thickness. Diameter: 60/60/42.4 mm.	
IV pipe manifold 30° branch Ø 120 mm	121	9.981-130.0		
IV pipe manifold 30° branch Ø 100 mm	122	9.981-128.0		
IV pipe manifold 30° branch Ø 75 mm	123	9.981-125.0		
IV pipe manifold 30° branch Ø 60 mm	124	9.981-122.0		
IV pipe manifold 30° branch Ø 42.4 mm	125	9.981-259.0	Pipe branch, 600 mm long, made from steel with 30° bend and 2 mm wall thickness. Diameter: 42.4/42.4/42.4 mm.	
IV pipe manifold Y-piece Ø 120 mm to 100 mm	126	9.981-135.0		


<sup>☐</sup> Available accessories.











	_	
		Order no.
ACCESSORIES STATIONARY		
IV pipelines		
IV pipe manifold Y-piece Ø 100 mm to 75 mm	127	9.981-134.0
IV pipe manifold Y-piece Ø 80 mm to 60 mm	128	9.981-133.0
IV pipe manifold Y-piece Ø 75 mm to 60 mm	129	9.981-132.0
IV pipe manifold Y-piece Ø 60 mm to 42 mm	130	9.981-131.0
IV pipe connectors/fastenings		
IV pipe coupling Ø 42.4 mm	131	9.980-445.0
IV pipe coupling Ø 60 mm	132	9.980-446.0
IV pipe coupling Ø 75 mm	133	9.980-447.0
IV pipe coupling Ø 100 mm	134	9.980-449.0
IV pipe clamp Ø 41 - 44 mm	135	9.980-463.0
IV pipe clamp Ø 60 - 63 mm	136	9.980-464.0
IV pipe clamp Ø 74 - 78 mm	137	9.980-465.0
IV pipe clamp Ø 99 - 103 mm	138	9.980-466.0
IV pipe clamp Ø 116 - 120 mm	139	9.980-467.0
IV pipe floor support	140	9.981-118.0
	_	

<sup>☐</sup> Available accessories.





















				$\overline{}$
		Order no.	Description	
ACCESSORIES STATIONARY				
IV pipe connectors/fastenings				
IV pipe on hose adapter, female Ø 42.2 to DN40	141	9.981-256.0		
IV pipe on hose adapter, female Ø 60 to DN50	142	9.981-166.0		
IV pipe on hose adapter, female Ø 75 to DN70	143	9.981-170.0		
IV pipe on hose adapter, male Ø 42.2 to DN40	144	9.981-257.0	Steel adapter with 2 mm wall thickness. For connecting pipe and hose, DN 40, to diameter $42.4 \times 2.0$ mm.	
IV pipe on hose adapter, male Ø 60 to DN50	145	9.981-332.0	Steel reducer with 2 mm wall thickness. End piece with external cone DN 50 to diameter $60.0 \times 2.0$ mm.	) [
IV pipe on hose adapter, male Ø 75 to DN70	146	9.981-195.0		
Suction point accessories		•		
Suction point standard PVC nozzle DN40	147	9.981-454.0	Elastic nozzle DN 40 for jet cookers.	
Suction point standard PVC nozzle DN50	148	9.981-455.0	Elastic nozzle DN 50 for jet cookers.	
Suction point, standard brush DN40	149	9.981-436.0	Steel brush nozzle with 2.6 mm wall thickness for jet cookers, DN 40.	
Suction point nozzle holder	150	9.981-520.0	For mounting intended nozzle holders made from steel to a wall. Suitable for nozzles with DN 40, DN 50 and DN 70.	
Suction point nozzle holder with limit switch	151	9.982-111.0	Jet cookers with sensor, for wall mounting. Suitable for nozzles DN 40, DN 50 and DN 70.	
Suction point hose hanger with limit switch ø 60 mm	152	9.982-083.0	Hose holder with limit switch for fastening to pipelines with 60 mm diameter.	
Suction point hose hanger with limit switch ø 75 mm	153	9.982-092.0	Hose holder with limit switch for fastening to pipelines with 75 mm diameter.	
Suction point hose hanger with limit switch	154	9.982-093.0	Hose holder with limit switch for wall mounting.	

<sup>☐</sup> Available accessories.













		Order no.	Description	
ACCESSORIES STATIONARY				
Suction point accessories				
Suction point suction arm DN50 without hose	155	9.981-776.0	Swivel arm DN 50 with relevant wall mounting. Arm length: 2 m.	
Suction point suction arm DN70 without hose	156	9.981-775.0	Swivel arm DN 70 with relevant wall mounting. Arm length: 2 m.	
Suction point suction arm DN50 without hose	157	9.981-781.0	Swivel arm DN 50 with floor support (100 × 100 mm), arm length: 2 m.	
Suction point suction arm DN70 without hose	158	9.981-780.0	Swivel arm DN 70 with floor support (100 × 100 mm), arm length: 2 m.	
Suction point suction arm DN70	159	9.981-920.0	Suction arm DN 70 to DN 100, arm length: 2.5 m.	
Suction point suction arm DN100	160	9.983-121.0	Suction arm DN 100, arm length: 2.5 m. Suction head with 150 mm diameter.	
Suction point PVC hose DN40 3m	161	9.989-701.0		
Suction point PVC hose DN40 5m	162	9.989-702.0		
Suction point PVC hose DN50 3m	163	9.989-693.0		
Suction point PVC hose DN50 5m	164	9.989-694.0		
Suction point PVC hose DN70 3m	165	9.989-703.0		
Suction point PVC hose DN70 5m	166	9.989-704.0		
Suction point PU hose DN40 3m	167	9.989-705.0		
Suction point PU hose DN40 5m	168	9.989-706.0		

 $<sup>\</sup>hfill\square$  Available accessories.















		Order no.	Description			
ACCESSORIES STATIONARY						
Suction point accessories						
Suction point PU hose DN50 3m	169	9.989-695.0				
Suction point PU hose DN50 5m	170	9.989-696.0				
Suction point PU hose DN70 3m	171	9.989-707.0				
Suction point PU hose DN70 5m	172	9.989-708.0				
Suction point ME-PU hose DN40 3m	173	9.989-697.0				
Suction point ME-PU hose DN40 5m	174	9.989-698.0				
Suction point ME-PU hose DN50 3m	175	9.989-699.0				
Suction point ME-PU hose DN50 5m	176	9.989-700.0				
Hose end piece, rotatable, female DN40	177	9.989-654.0	Rotatable hose end, DN 40, electrically conductive.			
Hose end piece, rotatable, female DN50	178	9.989-653.0	Rotatable hose end, DN 50, electroconductive.			
Hose end piece, rotatable, female DN70	179	9.989-652.0	Rotatable hose end, DN 70, electroconductive.			
Hose end piece, male DN40	180	9.981-142.0	Steel hose connection piece with 2 mm wall thickness and DN 40 external cone.			
Hose end piece, male DN50	181	9.980-472.0				
Hose end piece, male DN70	182	9.981-144.0	Steel hose connection piece with 2 mm wall thickness and DN 70 external cone.			

 $<sup>\</sup>hfill \square$  Available accessories.















		Order no.	Description	
ACCESSORIES STATIONARY				
Suction point accessories				
Hose end connector, female, stainless steel DN 40	183	9.989-716.0		
Hose end connector, female, stainless steel DN 50	184	9.989-714.0		
Hose end connector, male, stainless steel DN 40	185	9.989-717.0		
Hose end connector, male, stainless steel DN 50	186	9.989-715.0		
Hose installation kit DN40 without end pieces	187	9.981-563.0	Multi-part connection kit for hose connections in nominal width DN 40. The kit consists of two black hose sleeves and the corresponding pipe clamps.	
Hose installation kit DN50 without end pieces	188	9.981-561.0	Multi-part connection kit for hose connections in nominal width DN 50. The kit consists of two black hose sleeves and the corresponding pipe clamps.	
Hose installation kit DN70 without end pieces	189	9.981-562.0	Multi-part connection kit for hose connections in nominal width DN 70. The kit consists of two black hose sleeves and the corresponding pipe clamps.	

<sup>☐</sup> Available accessories.