

IVM 40/12-1 H Z22

Mobile middle class industrial vacuum cleaner with EC turbine. Suitable for the safe vacuuming of fine and coarse solids in dust class H and for use in ATEX zone 22.



Order no. 9.990-266.0

- Low-wear EC turbine

Technical data

EAN code		4066529007315
Power supply	V / Hz	220 - 240 / 50 - 60
Air flow	l/s / m³/h	43.8 / 158
Vacuum	mbar / kPa	249 / 24.9
Container capacity	l	40
Container material		Stainless steel
Rated input power	kW	1.2
Vacuuming type		Electric
Connection nominal diameter		DN 70
Accessory nominal diameter		DN 50 / DN 40
Sound pressure level	dB(A)	73
Main filter dust class		M
Filter area for main filter	m²	1.6
Secondary filter dust class		H
Filter area for secondary filter	m²	1.6
Weight without accessories	kg	51
Weight incl. packaging	kg	51
Dimensions (L × W × H)	mm	645 × 655 × 1140

This machine requires instruction.

Equipment

Main filter	Star filter
Secondary filter	Cartridge filter
Accessories included in the scope of delivery	no
Container emptying	Set-down trolley

- Included in the scope of supply.



Certified for ATEX Zone 22

- Explosion-proof industrial vacuum for safe vacuuming in ATEX Zone 22.



Dust class H

- Overall device certified according to DIN EN 60335-2-69 for dust class H.
- For safely picking up solids and dusts up to dust class H.




Low-wear EC turbine


- Brushless design for low-wear operation.
- Suitable for three-shift operation thanks to a minimum service life of 5000 hours.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0




1



2



4



5



6-7



8-9



10-11



12-13




14-15

		Order no.	Description	
FILTERS				
Bag/star filter				
Star filter PE/PTFE el. M 1,6m²	1	9.990-222.0		■
Cartridge filter				
Cartridge filter PE H14 1,6m²	2	9.993-005.0		■
OTHER ACCESSORIES				
Accessories holder completely	3	9.991-147.0		■
Power cable storage compartment	4	5.037-240.0	The power cord is stored on a hook attached to the tubular frame. The practical cord hook is suitable for a pipe diameter of 30 to 32 mm.	■
Accessories box completely	5	9.991-046.0		□
HANDLES				
Elbow aluminium 45° DN40	6	9.989-544.0	45° curved handle made from aluminium, DN 40.	□
Elbow aluminium 45° DN50	7	9.989-547.0	Handle with 45° bend. Made from aluminium, DN 50.	□
Handle stainless steel AISI 304 DN40	8	9.989-896.0		□
Handle stainless steel AISI 304 DN50	9	9.989-897.0		□
Handle straight stainless steel AISI 304 DN40	10	9.989-898.0		□
Handle straight stainless steel AISI 304 DN50	11	9.989-899.0		□
Handle carbon 45° DN-F40	12	9.989-916.0		□
Handle carbon 45° DN-F50	13	9.989-917.0		□
Handle carbon 110° DN-F40	14	9.989-918.0		□

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



		Order no.	Description	
HANDLES				
Handle carbon 110° DN-F50	15	9.989-919.0		☐
Handle DN 40	16	9.977-679.0	45° curved and electroconductive handle made from stainless steel. Inner cone DN 40.	☐
Handle DN50, curved	17	9.977-678.0	Electroconductive and 45° curved handle made from stainless steel. Inner cone DN 50.	☐
Stainless steel handle NW40	18	9.989-036.0	Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 40.	☐
Stainless steel handle NW50	19	9.988-111.0	Curved and electroconductive handle made from stainless steel. Angle 45°, inner cone NW 50.	☐
SUCTION TUBES				
Suction tube stainless steel AISI 304 DN40	20	9.989-912.0		☐
Suction tube stainless steel AISI 304 DN50	21	9.989-913.0		☐
Suction tube carbon 1500 mm DN-F40 conical	22	9.989-920.0		☐
Suction tube carbon 1500 mm DN-F50 conical	23	9.989-921.0		☐
Suction tube aluminium high temperature 1000 mm DN-F40	24	9.989-928.0		☐
Suction tube aluminium high temperature 1000 mm DN-F50	25	9.989-929.0		☐
Suction tube aluminium high temperature 2000 mm DN-F40	26	9.989-930.0		☐
Suction tube aluminium high temperature 2000 mm DN-F50	27	9.989-931.0		☐
Suction tube aluminium high temperature 3000 mm DN-F40	28	9.989-932.0		☐

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



		Order no.	Description	
SUCTION TUBES				
Suction tube aluminium high temperature 3000 mm DN-F50	29	9.989-933.0		☐
Suction tube 850 mm DN 40	30	9.977-525.0	Steel extension tube, electroconductive, DN 40. Length: 850 mm.	☐
Suction tube 850 mm DN 50	31	9.977-531.0	850 mm long extension tube made from steel. Electroconductive and with inner cone DN 50.	☐
Aluminium suction tube 1500 mm NW40	32	9.989-038.0	Aluminium extension tube, electroconductive, NW 40. Length: 1500 mm.	☐
Aluminium suction tube 1500 mm NW50	33	9.989-035.0	Electrically conductive suction tube (1500 mm) made of aluminium with 50 mm diameter.	☐
Stainless steel suction tube 850 mm NW40	34	9.989-039.0	Stainless steel extension tube, electroconductive, NW 40. Length: 850 mm.	☐
Stainless steel suction tube 850 mm NW50	35	9.988-114.0	Electroconductive extension tube made from stainless steel. Inner cone NW 50.	☐
FILTER T/ NT				
Safety filter sets/bags				
Safety filter bag, 5 Piece(s), NT 75/1	36	6.904-420.0	For dust-free/low-dust emptying in conjunction with the 4.070-930.0 container, with dust disposal bag, electrically conductive. Checked and approved for dust class H.	☐
ACCESSORY SETS				
Accessory kit for solids/dust				
Food accessory kit Expert DN 40	37	9.989-940.0	Food accessory kit DN 40: PU hose 3 m (9.989-970.0), handle (9.989-898.0), standard nozzle (9.989-838.0), brush (9.989-879.0), reducer (9.989-713.0), adapter (9.993-012.0).	☐
Food accessory kit Expert DN 50	38	9.989-941.0	Food accessory kit: PU hose 3 m (9.989-973.0), handle (9.989-899.0), standard nozzle (9.989-844.0), brush (9.989-880.0), reducer (9.989-712.0), adapter (9.993-011.0).	☐
Accessory kit for overhead cleaning Expert DN 40	39	9.989-942.0	Accessory kit DN 40 for overhead cleaning: suction tubes (9.989-920.0/9.993-008.0), handles (9.989-916.0/9.989-918.0), standard nozzle (9.989-838.0), brush (9.989-879.0), adapter (9.993-012.0).	☐
Accessory kit for overhead cleaning DN 50 Expert	40	9.989-943.0	Accessory kit DN 50 for overhead cleaning: suction tubes (9.989-921.0/9.993-009.0), handles (9.989-917.0/9.989-919.0), standard nozzle (9.989-844.0), brush (9.989-880.0), adapter (9.993-011.0).	☐
Professional dry floor cleaning set DN40	41	9.990-877.0	Professional dry floor cleaning set: adapter (9.990-874.0), hose (2.889-141.0), bend (2.889-172.0), 2 × suction tube (2.889-194.0), 3 × nozzles (6.906-958.0, 6.903-033.0, 6.902-105.0).	☐
Advanced dry floor cleaning set DN40	42	9.990-893.0	Advanced dry floor cleaning set: EVA hose (9.990-923.0), handle (9.990-929.0), 2 × suction tube (9.990-933.0), floor nozzle (9.990-935.0), standard nozzle (9.980-773.0).	☐

■ Included in the scope of supply. □ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



43



44



45



46



47, 53



48, 54



49, 55



50, 56



51, 57



52, 58

		Order no.	Description	
ACCESSORY SETS				
Accessory kit for solids/dust				
Advanced dry floor cleaning set DN50	43	9.990-894.0	Advanced dry floor cleaning set: EVA hose (9.990-924.0), handle (9.990-930.0), 2 × suction tube (9.990-934.0), floor nozzle (9.990-936.0), standard nozzle (9.980-761.0).	☐
Expert oven accessory kit, DN 35	44	9.991-106.0	Accessory kit for oven cleaning: adapter (9.990-987.0), adapter (5.031-436.0), suction hose (4.440-731.0), suction tube (4.321-161.0), 2 × suction tube (6.902-124.0), oven nozzle (4.130-104.0).	☐
Accessory kit for solids/dust Expert DN 40	45	9.989-659.0	Accessory kit DN 40 for industrial vacuum cleaners (solids and dust): EVA hose (9.988-088.0), handle (9.977-679.0), standard nozzle (9.988-401.0), reducer (9.989-690.0).	☐
Accessory kit for solids/dust DN 50 Expert	46	9.989-662.0	Accessory kit DN 50 for industrial vacuum cleaners (solids and dust): EVA hose (9.988-090.0), handle (9.977-678.0), standard nozzle (9.988-402.0), reducer (9.977-772.0).	☐
NOZZLES				
Standard nozzles				
Standard nozzle silicone FDA blue DN-F40	47	9.989-835.0		☐
Standard nozzle silicone FDA green DN-F40	48	9.989-836.0		☐
Standard nozzle silicone FDA red DN-F40	49	9.989-837.0		☐
Standard nozzle silicone FDA transparent DN-F40	50	9.989-838.0		☐
Standard nozzle silicone FDA white DN-F40	51	9.989-839.0		☐
Standard nozzle silicone FDA yellow DN-F40	52	9.989-840.0		☐
Standard nozzle silicone FDA blue DN-F50	53	9.989-841.0		☐
Standard nozzle silicone FDA green DN-F50	54	9.989-842.0		☐
Standard nozzle silicone FDA red DN-F50	55	9.989-843.0		☐
Standard nozzle silicone FDA transparent DN-F50	56	9.989-844.0		☐

☐ Available accessories.


ACCESSORIES FOR IVM 40/12-1 H Z22
9.990-266.0



		Order no.	Description	
NOZZLES				
Standard nozzles				
Standard nozzle silicone FDA white DN-F50	57	9.989-845.0		☐
Standard nozzle silicone FDA yellow DN-F50	58	9.989-846.0		☐
Standard nozzle silicone DN40	59	9.988-401.0	Stretchy standard nozzle made from silicone, inner cone DN 40.	☐
Standard nozzle silicone DN50	60	9.988-402.0		☐
Standard nozzle cuttable rubber DN40	61	9.989-677.0	Standard nozzle, electroconductive, made from cuttable rubber. DN 40.	☐
Standard nozzle cuttable rubber DN50	62	9.989-675.0	Standard nozzle, electroconductive, made from cuttable rubber. DN 50.	☐
Floor nozzles				
Floor nozzle stainless steel AISI 304 DN-F40 blue	63	9.989-861.0		☐
Floor nozzle stainless steel AISI 316L DN-F50 blue	64	9.989-862.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 green	65	9.989-863.0		☐
Floor nozzle stainless steel AISI 316L DN-F50 green	66	9.989-864.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 red	67	9.989-865.0		☐
Floor nozzle stainless steel AISI 316L DN-F50 red	68	9.989-866.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 transparent	69	9.989-867.0		☐
Floor nozzle stainless steel AISI 316L DN-F50 transparent	70	9.989-868.0		☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22
9.990-266.0

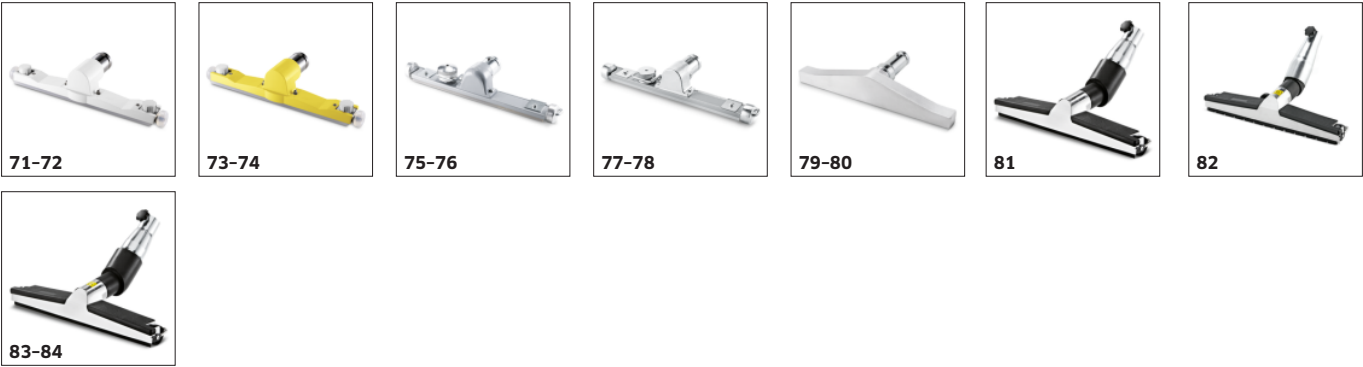

		Order no.	Description	
NOZZLES				
Floor nozzles				
Floor nozzle stainless steel AISI 316L DN-F40 white	71	9.989-869.0		☐
Floor nozzle stainless steel AISI 316L DN-F50 white	72	9.989-870.0		☐
Floor nozzle stainless steel AISI 316L DN-F40 yellow	73	9.989-871.0		☐
Floor nozzle stainless steel AISI 316L DN-F50 yellow	74	9.989-872.0		☐
Floor nozzle stainless steel AISI 316L DN-F40	75	9.989-914.0		☐
Floor nozzle stainless steel AISI 316L DN-F50	76	9.989-915.0		☐
Floor nozzle stainless steel 400 mm DN-F40	77	9.989-934.0		☐
Floor nozzle stainless steel 400 mm DN-F50	78	9.989-935.0		☐
Floor nozzle aluminium 400 mm DN-F40	79	9.989-936.0		☐
Floor nozzle aluminium 400 mm DN-F50	80	9.989-937.0		☐
Aluminium floor nozzle 370 mm DN40	81	9.989-683.0	Floor nozzle, 370 mm, made from aluminium. DN 40.	☐
Aluminium floor nozzle, el, 370 mm, DN40	82	9.989-682.0	Floor nozzle, 370 mm, made from aluminium. Electroconductive. DN 40.	☐
Aluminium floor nozzle 370 mm DN50	83	9.989-664.0	Floor nozzle. 370 mm, made from aluminium. Electroconductive. DN 50.	☐
Aluminium floor nozzle, el, 370 mm, DN50	84	9.987-612.0	Electroconductive multi-purpose floor nozzle. 370 mm wide, DN 50.	☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



		Order no.	Description	
NOZZLES				
Floor nozzles				
Aluminium floor nozzle 500 mm DN50	85	9.989-684.0	Floor nozzle, 500 mm, made from aluminium. Electroconductive. DN 50.	☐
Aluminium floor nozzle, el, 500 mm, DN50	86	9.981-925.0	Floor nozzle with 500 mm suction width and hinge. DN 50, electroconductive.	☐
Stainless steel floor nozzle el 370 mm DN40	87	9.989-558.0	Multi-purpose floor nozzle (370 mm), electroconductive, DN 40.	☐
Stainless steel floor nozzle el 370 mm DN50	88	9.988-115.0	Floor nozzle (370 mm) made from stainless steel, electroconductive, DN 50.	☐
Wide nozzles				
Lane nozzle set	89	9.991-032.0		☐
Crevice nozzles				
Crevice nozzle 17 mm × 120 mm DN40	90	9.989-680.0	Electroconductive crevice nozzle, 17 × 120 mm. DN 40.	☐
Crevice nozzle 25 mm × 120 mm DN40	91	9.989-678.0	Electroconductive crevice nozzle, 25 × 120 mm. DN 40.	☐
Crevice nozzle 18 mm × 120 mm DN50	92	9.981-442.0	Electroconductive crevice nozzle made from sheet steel, DN 50, with 17 mm slot width.	☐
Crevice nozzle 25 mm × 120 mm DN50	93	9.981-465.0	Electroconductive crevice nozzle made from sheet steel, DN 50, with 25 mm slot width.	☐
Stainless steel crevice nozzle 17 mm × 120 mm DN40	94	9.989-193.0	Crevice nozzle made from stainless steel, DN 50.	☐
Stainless steel crevice nozzle 22 mm × 220 mm DN50	95	9.988-123.0	Stainless steel crevice nozzle, DN 42, suitable for use with foods.	☐
Flexible crevice nozzles				
Crevice nozzle flexible silicone FDA DN-F50 transparent	96	9.989-847.0		☐
Crevice nozzle flexible silicone FDA DN-F40 transparent	97	9.989-848.0		☐
Flexible crevice nozzle silicone 65 mm DN50	98	9.988-403.0	Flexible crevice nozzle made from silicone, DN 50.	☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



		Order no.	Description	
NOZZLES				
Flexible crevice nozzles				
Flexible crevice nozzle 11 mm × 58 mm DN40	99	9.989-681.0	Electroconductive and flexible crevice nozzle, 11 × 58 mm.	☐
Flexible crevice nozzle 20 mm × 45 mm DN40	100	9.981-423.0	Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 40.	☐
Flexible crevice nozzle 12 mm × 45 mm DN50	101	9.981-424.0	Flexible, electroconductive galvanised crevice nozzle, DN 50, with 13 mm slot width.	☐
Flexible crevice nozzle 20 mm × 45 mm DN50	102	9.981-425.0	Flexible and electroconductive crevice nozzle made from galvanised steel with 20 mm slot width, DN 50.	☐
Surface nozzles				
Silicone surface nozzle FDA blue DN-F40	103	9.989-849.0		☐
Silicone surface nozzle FDA blue DN-F50	104	9.989-850.0		☐
Silicone surface nozzle FDA green DN-F40	105	9.989-851.0		☐
Silicone surface nozzle FDA green DN-F50	106	9.989-852.0		☐
Silicone surface nozzle FDA red DN-F40	107	9.989-853.0		☐
Silicone surface nozzle FDA red DN-F50	108	9.989-854.0		☐
Silicone surface nozzle FDA transparent DN-F40	109	9.989-855.0		☐
Silicone surface nozzle FDA transparent DN-F50	110	9.989-856.0		☐
Silicone surface nozzle FDA white DN-F40	111	9.989-857.0		☐
Silicone surface nozzle FDA white DN-F50	112	9.989-858.0		☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



113-114



115-116



117-118



119



120



121-122



123-124



125-126

		Order no.	Description	
NOZZLES				
Surface nozzles				
Silicone surface nozzle FDA yellow DN-F40	113	9.989-859.0		☐
Silicone surface nozzle FDA yellow DN-F50	114	9.989-860.0		☐
Silicone surface nozzle 120 mm DN40	115	9.988-118.0	Electroconductive rubber nozzle, angled, DN 40, suitable for use with foods.	☐
Silicone surface nozzle 120 mm DN50	116	9.988-119.0	Electroconductive rubber nozzle, angled, DN 50, suitable for use with foods.	☐
Aluminium surface nozzle, 150 mm, DN 40	117	9.989-666.0	Surface nozzle, 150 mm, made from aluminium. DN 40.	☐
Aluminium surface nozzle 150 mm DN50	118	9.989-665.0	Surface nozzle, 150 mm, made from aluminium. DN 50.	☐
BRUSHES				
Standard brushes				
Standard brush 40 mm DN40	119	9.981-431.0	Flat brush nozzle DN 40.	☐
Standard brush 40 mm DN50	120	9.981-432.0	Flat brush nozzle DN 50.	☐
End brushes				
Brush FDA blue ø 75 mm DN-F40	121	9.989-873.0		☐
Brush FDA blue ø 75 mm DN-F50	122	9.989-874.0		☐
Brush FDA green ø 75 mm DN-F40	123	9.989-875.0		☐
Brush FDA green ø 75 mm DN-F50	124	9.989-876.0		☐
Brush FDA red ø 75 mm DN-F40	125	9.989-877.0		☐
Brush FDA red ø 75 mm DN-F50	126	9.989-878.0		☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



		Order no.	Description	
BRUSHES				
End brushes				
Brush FDA white ø 75 mm DN-F40	127	9.989-879.0		☐
Brush FDA white ø 75 mm DN-F50	128	9.989-880.0		☐
Brush FDA yellow ø 75 mm DN-F40	129	9.989-881.0		☐
Brush FDA yellow ø 75 mm DN-F50	130	9.989-882.0		☐
End brush Ø 82 mm DN40	131	9.989-609.0	Electroconductive end brush with 82 mm diameter. DN 40.	☐
End brush Ø 82 mm DN50	132	9.989-608.0	Electroconductive end brush with 82 mm diameter. DN 50.	☐
Surface brushes				
Surface brush 300 mm DN40	133	9.981-911.0	Vacuum brush, 300 mm, with 45° connection, with star screw, horsehair bristles.	☐
Surface brush 300 mm DN50	134	9.981-912.0		☐
Cylinder brushes				
Cylinder brush ø 100 mm DN-F40	135	9.989-922.0		☐
Cylinder brush ø 200 mm DN-F40	136	9.989-923.0		☐
Cylinder brush ø 100 mm DN-F50	137	9.989-925.0		☐
Cylinder brush ø 200 mm DN-F50	138	9.989-926.0		☐
HOSES				
ME hoses				
Hose ME DN40 3 m	139	9.989-976.0		☐
Hose ME DN40 5 m	140	9.989-977.0		☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



139-143



144, 186-187,
189-190



145-148



149-150, 152-153



151, 154

		Order no.	Description	
HOSES				
ME hoses				
Hose without connection ME DN40 15 m	141	9.989-978.0		☐
Hose ME DN50 3 m	142	9.989-979.0		☐
Hose ME DN50 5 m	143	9.989-980.0		☐
PVC				
Hose PVC DN40 1 m	144	9.989-626.0	Electroconductive PVC hose, DN 40. Temperature-resistant up to 85 °C. Length: 1 m.	☐
Hose PVC DN40 3 m	145	9.989-962.0		☐
Hose PVC DN40 5 m	146	9.989-963.0		☐
Hose PVC DN50 3 m	147	9.989-964.0		☐
Hose PVC DN50 5 m	148	9.989-965.0		☐
Hose PVC DN40 3 m	149	9.989-647.0	PVC hose, DN 40. Temperature-resistant up to 85 °C and electrically conductive. Length: 3 m.	☐
Hose PVC DN40 5 m	150	9.989-614.0	Electroconductive PVC hose, DN 40. Temperature-resistant up to 85 °C. Length: 5 m.	☐
PVC hose DN40 15 m without connectors	151	9.989-633.0	PVC hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 85 °C. Length: 15 m.	☐
Hose PVC DN50 3 m	152	9.989-615.0	Electroconductive PVC hose, DN 50. Temperature-resistant up to 85 °C. Length: 3 m.	☐
Hose PVC DN50 5 m	153	9.989-616.0	Electroconductive PVC hose, DN 50. Temperature-resistant up to 85 °C. Length: 5 m.	☐
PVC hose DN50 15 m without connectors	154	9.989-634.0	PVC hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 85 °C. Length: 15 m.	☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



		Order no.	Description	
HOSES				
EVA hoses				
Hose EVA DN40 3 m	155	9.989-982.0		☐
Hose EVA DN40 5 m	156	9.989-983.0		☐
Hose EVA DN50 3 m	157	9.989-984.0		☐
Hose EVA DN50 5 m	158	9.989-985.0		☐
Hose EVA NW40 3 m	159	9.988-088.0	Electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 3 m.	☐
Hose EVA NW40 5 m	160	9.988-089.0	Five-metre-long, electroconductive hose with NW 40. Suitable for temperatures up to 65°C. Length: 5 m.	☐
EVA hose DN40 15 m without connectors	161	9.989-630.0	EVA hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 65 °C. Length: 15 m.	☐
Hose EVA NW50 3 m	162	9.988-090.0	Electroconductive hose with NW50. Suitable for temperatures up to 65°C. Length: 3 m.	☐
Hose EVA NW50 5 m	163	9.988-091.0		☐
EVA hose DN50 15 m without connectors	164	9.989-631.0	EVA hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 65 °C. Length: 15 m.	☐
Hose installation sets				
Hose installation kit DN40	165	9.989-627.0	Multipiece hose connection set, DN 40.	☐
Hose installation kit DN50	166	9.989-628.0	Multipiece hose connection kit, DN 50.	☐
Hose connection kit, stainless steel AISI 304 DN40	167	9.989-986.0	Hose connection kit in nominal width DN 40, made of stainless steel. Contents: 1 hose connection piece, 1 hose connection (rotating), 2 hose clamps, 2 hose end pieces (black), 1 flat bag (PE plastic).	☐
Hose connection kit, stainless steel AISI 304 DN50	168	9.989-987.0	Hose connection kit in nominal width DN 50, made of stainless steel. Contents: 1 hose connection piece, 1 hose connection (rotating), 2 hose clamps, 2 hose end pieces (black), 1 flat bag (PE plastic).	☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22
9.990-266.0



		Order no.	Description	
HOSES				
PU hoses				
Hose PU DN40 3 m	169	9.989-966.0		☐
Hose PU DN40 5 m	170	9.989-967.0		☐
Hose PU DN50 3 m	171	9.989-968.0		☐
Hose PU DN50 5 m	172	9.989-969.0		☐
Hose PU FDA DN40 3 m	173	9.989-970.0		☐
Hose PU FDA DN40 5 m	174	9.989-971.0		☐
Hose PU FDA DN40 15 m	175	9.989-972.0		☐
Hose PU FDA DN50 3 m	176	9.989-973.0		☐
Hose PU FDA DN50 5 m	177	9.989-974.0		☐
Hose PU FDA DN50 15 m	178	9.989-975.0		☐
Hose PU DN40 3 m	179	9.989-617.0	Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m.	☐
Hose PU DN40 5 m	180	9.989-618.0	Oil-resistant, electroconductive PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	☐
PU hose DN40 15 m without connectors	181	9.989-637.0	PU hose without tap adapter, DN 40. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m.	☐
Hose PU DN50 3 m	182	9.989-619.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 3 m.	☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



179-180, 182-183




181, 184



185, 186-187,
189-190




188



191



192-193



194-195



196-197

		Order no.	Description	
HOSES				
PU hoses				
Hose PU DN50 5 m	183	9.989-620.0	Oil-resistant, electroconductive PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 80 °C. Length: 5 m.	☐
PU hose DN50 15 m without connectors	184	9.989-638.0	PU hose without tap adapter, DN 50. Electroconductive and temperature-resistant up to 80 °C. Length: 15 m.	☐
ME-PU-hoses				
Hose without connection ME DN50 15 m	185	9.989-981.0		☐
Hose ME-PU DN40 3 m	186	9.989-621.0	Electroconductive, oil-resistant ME-PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 3 m.	☐
ME-PU hose, DN 40, 5 m	187	9.989-622.0	Electroconductive, oil-resistant ME-PU hose, DN 40. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 5 m.	☐
ME-PU hose DN40 15 m without connectors	188	9.989-640.0	Electroconductive, oil-resistant ME-PU hose without tap adapter, DN 40. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 15 m.	☐
Hose ME-PU DN50 3 m	189	9.989-623.0	Electroconductive, oil-resistant ME-PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 3 m.	☐
Hose ME-PU DN50 5 m	190	9.989-625.0	Electroconductive, oil-resistant ME-PU hose, DN 50. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 5 m.	☐
ME-PU hose DN50 15 m without connectors	191	9.989-641.0	Electroconductive, oil-resistant ME-PU hose without tap adapter, DN 50. Suitable for abrasive suction media and temperature-resistant up to 110 °C. Length: 15 m.	☐
ADAPTERS / REDUCERS / DISTRIBUTORS				
Accessories adapter				
Adapter Food DN-F50	192	9.993-011.0		☐
Adapter Food DN-F40	193	9.993-012.0		☐
Reducers/expanders				
Reducer DN 70 to DN 50	194	9.977-772.0		☐
Reduction DN70 to DN40	195	9.989-690.0	Electroconductive steel reducer for reduction from DN 70 to DN 40.	☐
Stainless steel reducer DN 70 to DN 50	196	9.989-712.0		☐

☐ Available accessories.

ACCESSORIES FOR IVM 40/12-1 H Z22

9.990-266.0



		Order no.	Description	
ADAPTERS / REDUCERS / DISTRIBUTORS				
Reducers/expanders				
Stainless steel reducer DN 70 to DN 40	197	9.989-713.0		☐
Reduction DN70 to ø 50mm	198	9.977-585.0		☐
PRE-SEPARATORS				
Pre-separator				
Pre-separator Tc Op liquids 125 l DN70	199	9.989-686.0	125 litre pre-separator, DN 70.	☐
Pre-separator Ef solid materials 100 l DN70	200	9.982-238.0	Mobile pre-separator station with 100 l volume and discharge flap.	☐
Pre-separator dust 40 l DN40	201	9.989-687.0		☐
Pre-separator dust 60 l DN50	202	9.989-688.0		☐
Pre-separator drum 200 l	203	9.989-685.0	Standard drum which complies with the ISO 15750-2 standard.	☐
Pre-separator lid				
Pre-separator cover Op liquids ø 517 mm DN70	204	9.981-666.0	Pre-separator cover DN 70. Suitable for containers with 517 mm diameter.	☐
Pre-separator cover Op liquids ø 575 mm DN70	205	9.981-662.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).	☐
Pre-separator cover solid materials ø 517 mm DN70	206	9.981-665.0	Pre-separator cover DN 70. Suitable for containers with 517 mm diameter.	☐
Pre-separator cover solid materials ø 575 mm DN70	207	9.981-661.0	Pre-separator cover DN 70 for 200 litre standard drum (9.989-685.0).	☐

☐ Available accessories.